



TECHNICAL DATA

Tru-Trac Compact Dual Return Tracker


Low Speed Rubber 16mm Adjustable (400 BRK)

Doc. No: TTMQ432

Page: 1 of 1

Rev: 0

Date: 31.03.2021

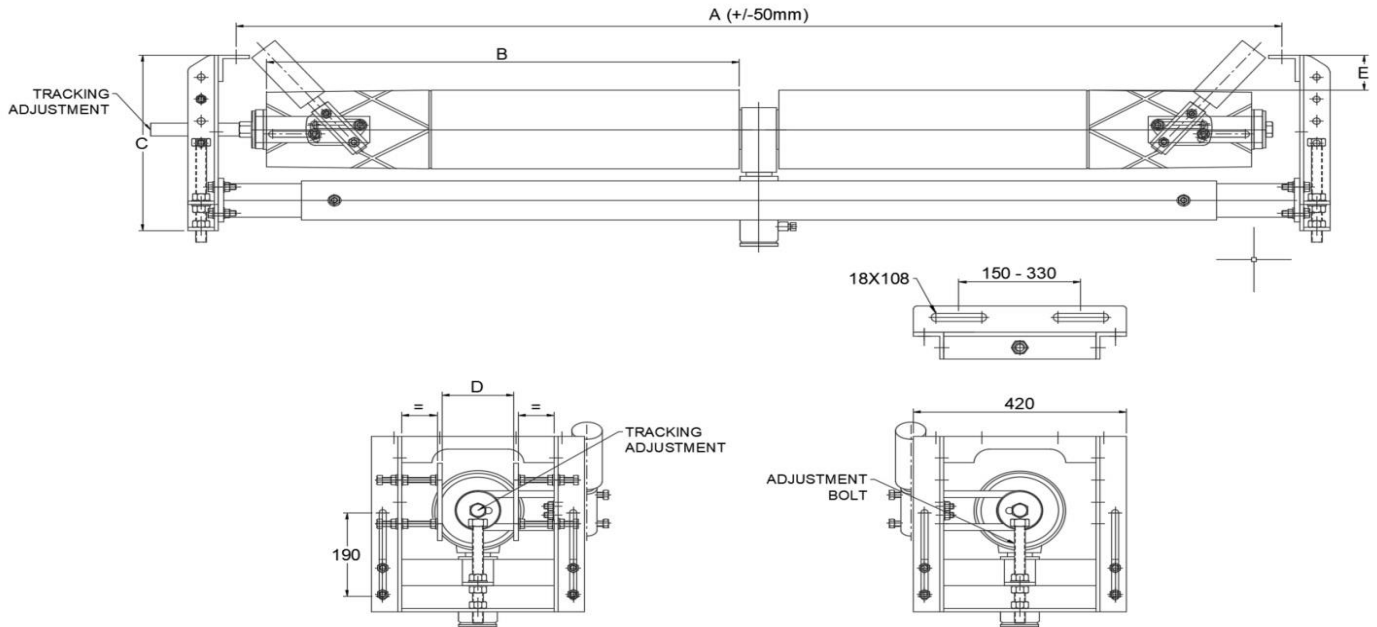

Code	Belt width	A Adjustable +/-50mm	B	C	D	E Min - Max	Weight (Kg)
TTDR90LSCOMP	900	1144	480	440	86	(-40) - 80	-
TTDR105LSCOMP	1050	1296	550	440	88	(-40) - 80	-
TTDR120LSCOMP	1200	1448	630	440	90	(-40) - 80	-
TTDR135LSCOMP	1350	1600	705	440	92	(-40) - 80	-
TTDR140LSCOMP	1400	1700	730	440	94	(-40) - 80	-
TTDR150LSCOMP	1500	1752	780	440	98	(-40) - 80	-
TTDR160LSCOMP	1600	1900	855	440	102	(-40) - 80	-
TTDR165LSCOMP	1650	1900	855	440	104	(-40) - 80	-
TTDR180LSCOMP	1800	2058	930	440	110	(-40) - 80	-
TTDR200LSCOMP	2000	2260	1040	440	118	(-40) - 80	-
TTDR210LSCOMP	2100	2362	1090	440	122	(-40) - 80	-
TTDR220LSCOMP	2200	2464	1140	440	126	(-40) - 80	-
TTDR230LSCOMP	2300	2515	1190	440	130	(-40) - 80	-
TTDR240LSCOMP	2400	2668	1240	440	134	(-40) - 80	-
TTDR250LSCOMP	2500	2770	1290	440	138	(-40) - 80	-
TTDR260LSCOMP	2600	2820	1340	440	142	(-40) - 80	-

Outside Drum Dia= 178*

All dimensions in mm

Non standard trackers can be made to customer specifications

* 178 dia, represents the minimum diameter, the actual dia can vary between 178 to 182

TRU-TRAC ROLLERS (PTY) LTD

Tel: +27 (12) 661-9531 Fax: +27 (12) 661-9489 Web Page: <http://www.tru-trac.com>

Email: info@tru-trac.com PO Box 8707 Centurion 0046