

# TECHNICAL DATA

## Tru-Trac V-Return Tracker 10 Degree Thrust Polyurethane (Fire Retardant) FRAS 12mm


Doc. No:TTMQ630

Page: 1 of 1

Rev: 0

Date: 22.05.2018

Outside Drum Dia = 170\*

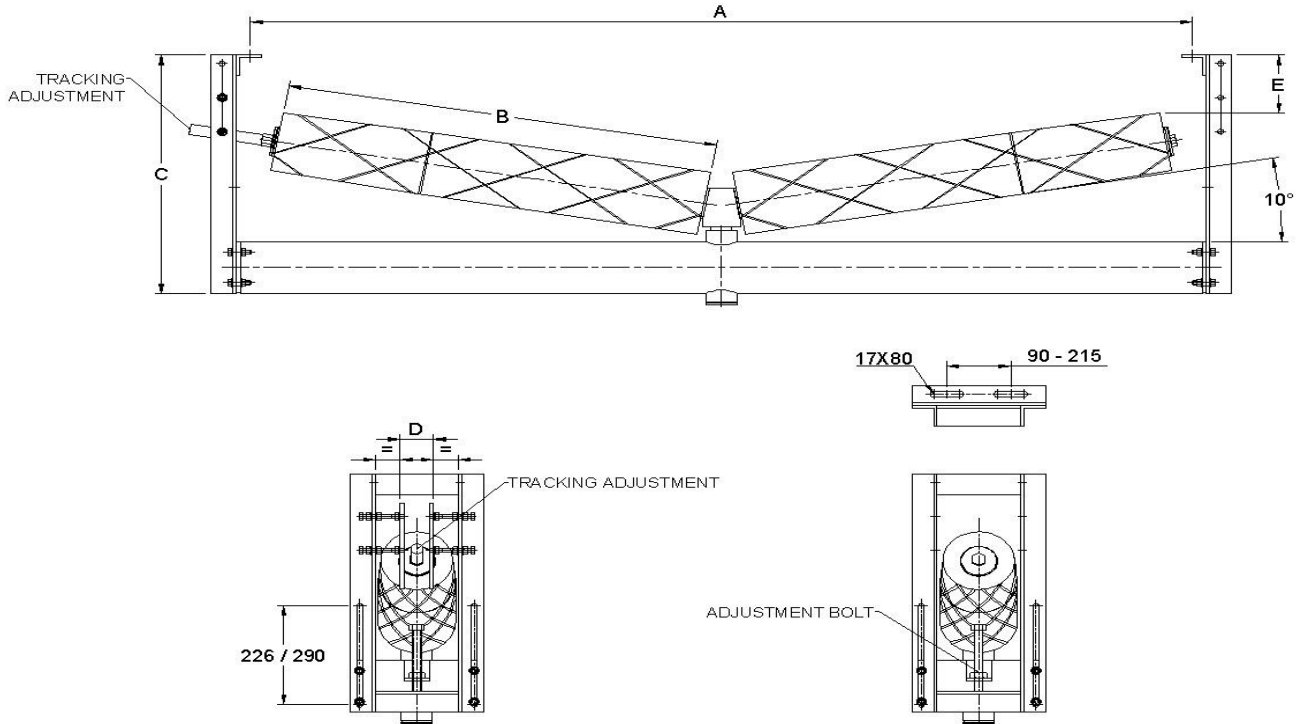

Code	Belt width	A	B	C (Bracket Height)	D	E Min - Max	Weight (Kg)
TTVR105TP12F	1050	1296	550	550	88	20 - 115	130
TTVR120TP12F	1200	1448	630	550	90	20 - 100	134
TTVR135TP12F	1350	1600	705	550	92	20 - 85	138
TTVR140TP12F	1400	1700	730	550	94	20 - 80	140
TTVR150TP12F	1500	1752	780	550	98	20 - 75	152
TTVR160TP12F	1600	1900	855	550	102	20 - 65	158
TTVR165TP12F	1650	1900	855	550	104	20 - 65	158
TTVR180TP12F	1800	2058	930	700	110	20 - 195	167
TTVR200TP12F	2000	2260	1040	700	118	20 - 180	190
TTVR210TP12F	2100	2362	1090	700	122	20 - 170	198
TTVR220TP12F	2200	2464	1140	700	126	20 - 155	206
TTVR230TP12F	2300	2515	1190	700	130	20 - 150	214
TTVR240TP12F	2400	2668	1240	700	134	20 - 145	220
TTVR250TP12F	2500	2770	1290	700	138	20 - 135	228
TTVR260TP12F	2600	2820	1340	700	142	20 - 125	306

All dimensions in mm

**Non standard trackers can be made to customer specification**

\* 170 dia, represents the minimum diameter, the actual dia can vary between 170 to 174

**TRU-TRAC ROLLERS (PTY) LTD**

Tel: +27 (12) 661-9531 Fax: +27 (12) 661-9498 Web Page: <http://www.tru-trac.com>  
Email: [info@tru-trac.com](mailto:info@tru-trac.com) PO Box 8707 Centurion 0046