



TECHNICAL DATA

Tru-Trac Flat Return Tracker HD

Thrust Polyurethane (Fire Retardant)


FRAS 12mm

Doc. No: TTMQ716

Page: 1 of 1

Rev: 0

Date: 30.07.2021

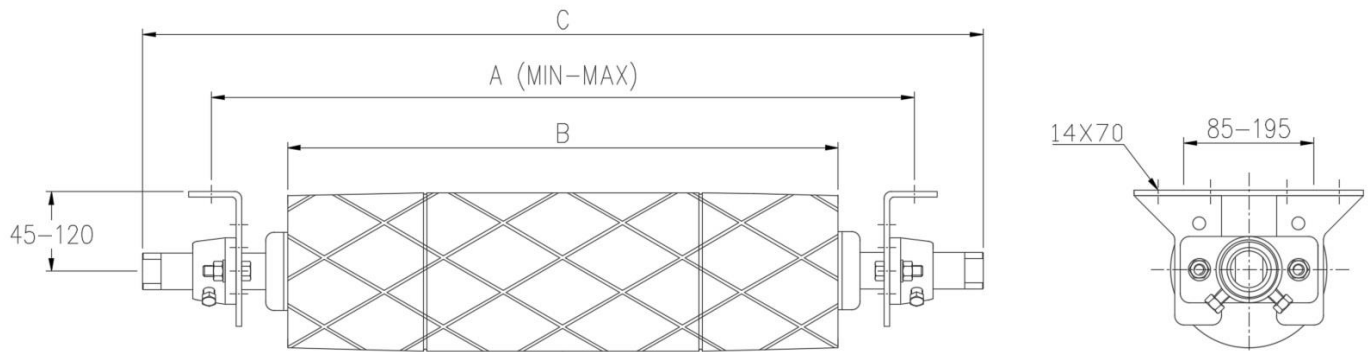

Code	Belt width	A (Mounting Centre)	A Min - Max	B	C	Weight (Kg)
TTFR105HDTP12F	1050	1296	1196 - 1366	1120	1450	78
TTFR120HDTP12F	1200	1448	1346 - 1518	1270	1600	80
TTFR135-140HDTP12F	1350 / 1400	1600 / 1700	1510 - 1720	1450	1850	83
TTFR150HDTP12F	1500	1752	1672 - 1822	1590	1950	86

Outside Drum Dia= 170*
Shaft = 40 Dia

All dimensions in mm

Non standard trackers can be made to customer specifications

* 170 dia, represents the minimum diameter, the actual dia can vary between 170 to 174

TRU-TRAC ROLLERS (PTY) LTD

Tel: +27 (12) 661-9531 Fax: +27 (12) 661-9489 Web Page: <http://www.tru-trac.com>

Email: info@tru-trac.com PO Box 8707 Centurion 0046